



WTS International



PRODUCT CATALOGUE 2026

About Us

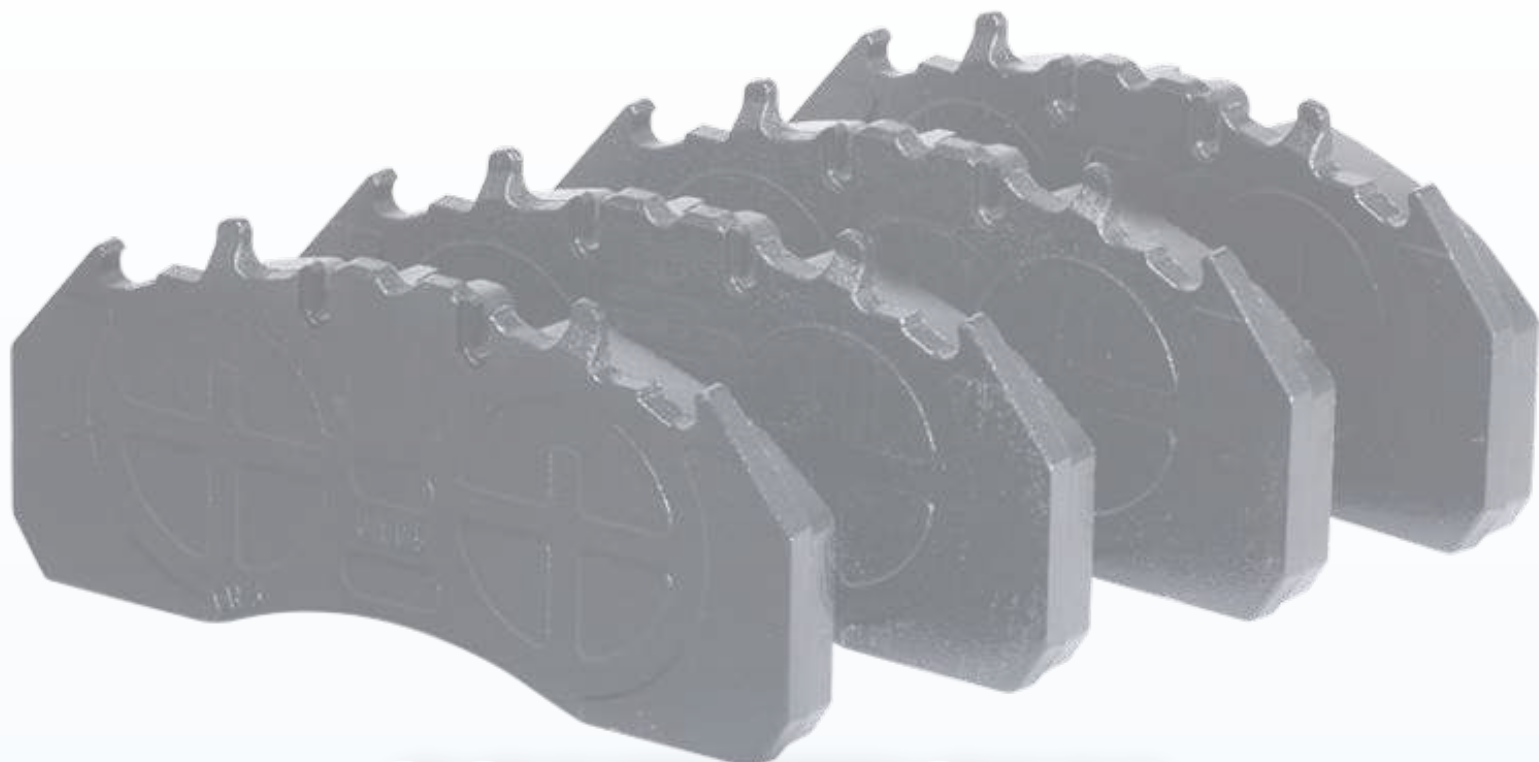
WTS International is a leading exporting firm established in 1995, Kolkata, West Bengal. We believe that business grows on faith & trust, along with commitment & passion. We export products with a complete check on Quality, Vendor Scrutinization and Traceability. We offer products to our clients, with a complete check on all parameters of product specifications. Our experienced team is equipped to source the best products at the best price in the best timelines.

We have over 2 decades experience in sourcing, merchandising, buying & trading commodities across various product categories. As a leading Merchant Exporter, we are a team of passionate business professionals, with a hands-on approach towards business. Our endeavour is to keep up to the promise & deliver beyond satisfaction.

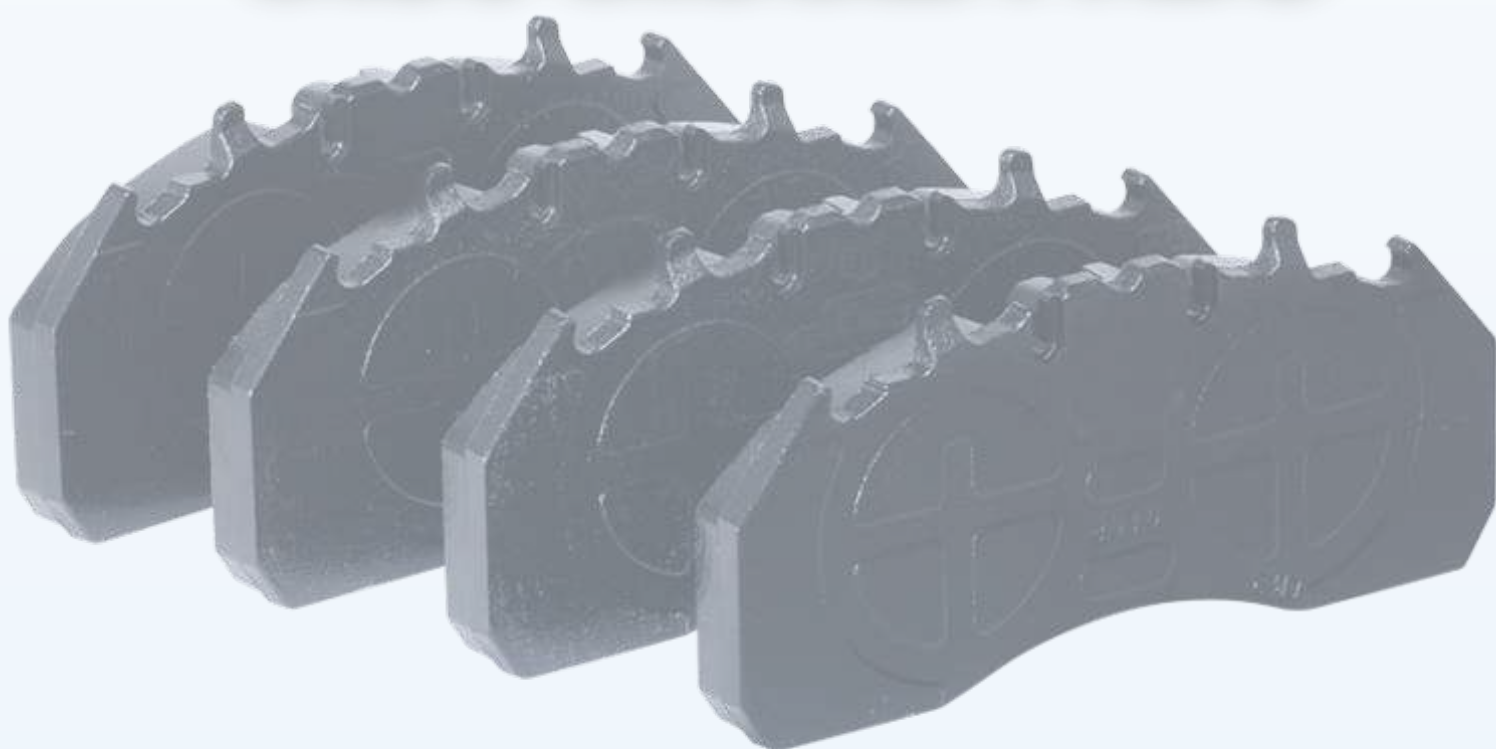
WTS International, is a perfect blend of experienced professionals with solid experience of technical, commercial, trading/logistics and financial background. What sets WTS International, to stand out is that, we provide a price advantage, personalized service and also encourage orders of all sizes & volumes.

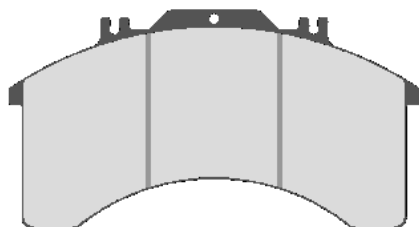
At WTS International, our ideology (management mantra) is “Your success,our mission ” and this ideology is percolated across our business processes. We aim to provide a trustworthy & faithful relationship with all our suppliers, buyers, importers, exporters, channel partners, etc.

WTS International, is a reputed exporter from India, with excellent sourcing skills, developed over decades, with the best manufacturers. We can source a wide range of product categories, including Engineering goods, Automoblie spares, Kidswear and infant clothing, Leather gloves, Leather jackets, Leather shoes and many more.



COMMERCIAL VEHICLE DISC BRAKE PADS

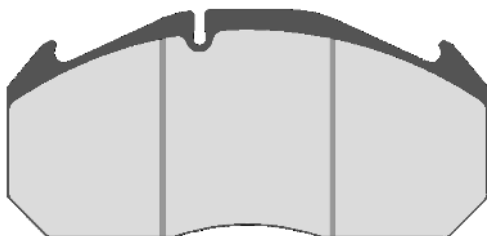


29032

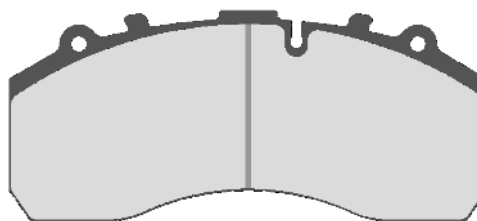
Length: 205.85 | Width: 109.80 | Thickness: 24.50 / 25.00
Application: IVECO

29067

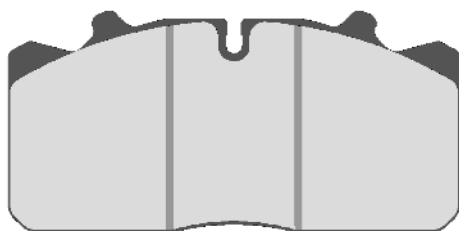
Length: 176.50 | Width: 78 | Thickness: 21.5 / 22.00
Application: IVECO, Renault RVI

29084

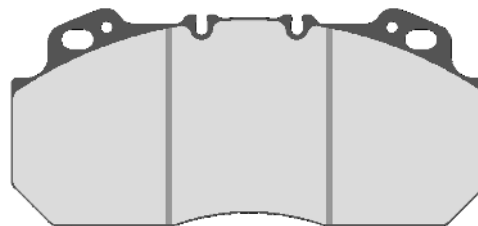
Length: 249.35 | Width: 118.10 | Thickness: 29.50 / 30.00
Application: Mercedes Benz, Meritor

29087

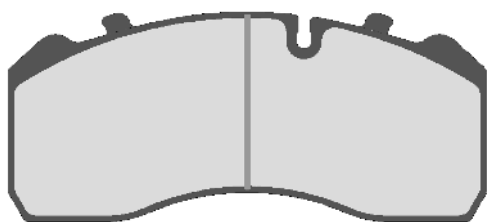
Length: 247.60 | Width: 109.50 | Thickness: 29.50 / 30.00
Application: Auwater, Bova, BPW, Kassbohrer, Mercedes Benz, Saur, Scania
This pad replaces 29016, 29042, 29045, 29046, 29059, 29060, 29061, 29062, 29087

29088

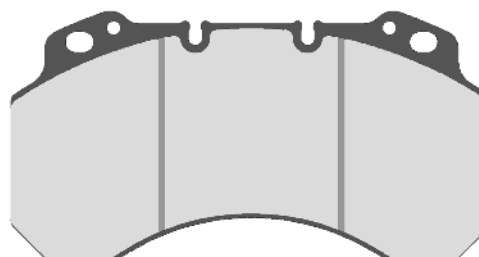
Length: 175.60 | Width: 85.50 | Thickness: 25.50 / 26.00
Application: Man

29090

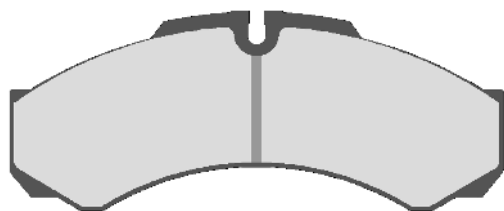
Length: 249.60 | Width: 114.40 | Thickness: 27.5 / 28.00
Application: Renault RVI, Dennis, Volvo

29095

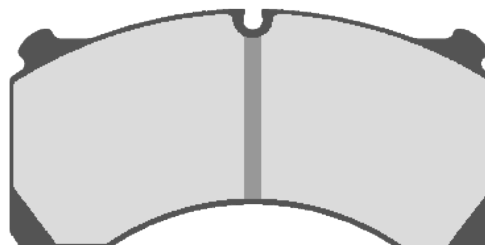
Length: 210.70 | Width: 92.50 | Thickness: 29.50 / 30.00
Application: Mercedes Benz

29100

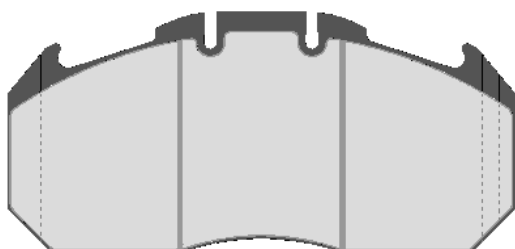
Length: 213.80 | Width: 111.75 | Thickness: 24.75 / 25.25
Application: RVI, Nissan

29121

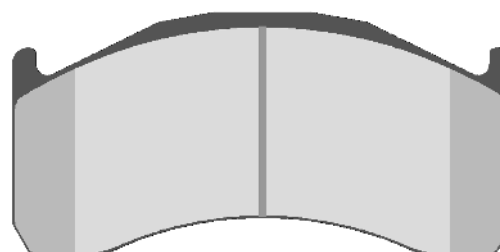
Length: 164.80 | Width: 66.30 | Thickness: 20.10 / 20.50
Application: IVECO

29124

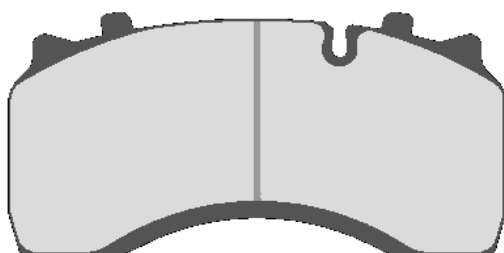
Length: 205.65 | Width: 102.30 | Thickness: 26.50 / 27.00
Application: DAF, Renault

29131

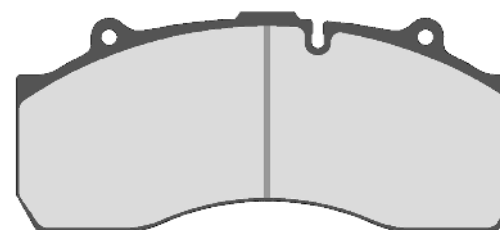
Length: 249.60 | Width: 117.90 | Thickness: 31.50 / 32.00 (Incl.step)
Thickness: 31.50 / 32.00 (Excl.step)
Application: MAN, RVI, ERF

29137

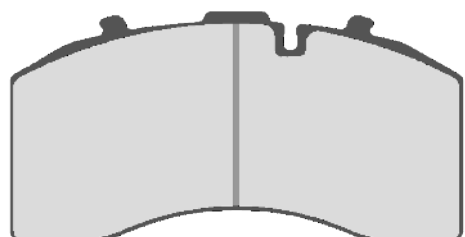
Length: 210.15 | Width: 102.40 | Thickness: 29.75 / 29.25
Application: Volvo C – Duco

29142

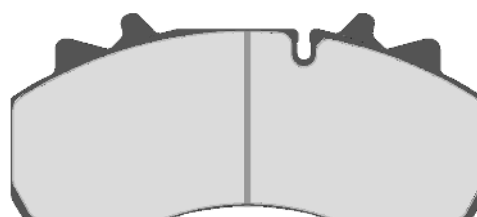
Length: 204.50 | Width: 96.80 | Thickness: 29.35 / 29.85
Application: Renault

29143

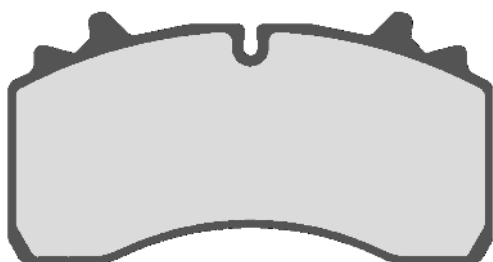
Length: 247.50 | Width: 108.30 | Thickness: 29.50 / 30.00
Application: Scania

29158

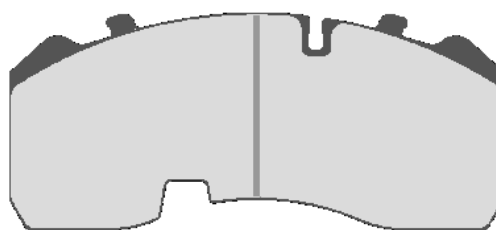
Length: 210.80 | Width: 107.70 | Thickness: 29.50 / 30.00
Application: Mercedes, SAF

29159

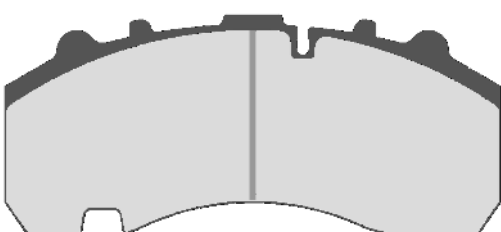
Length: 210.50 | Width: 85.25 | Thickness: 28.80 / 29.30
Application: SAF, SAVER, WABCO

29162

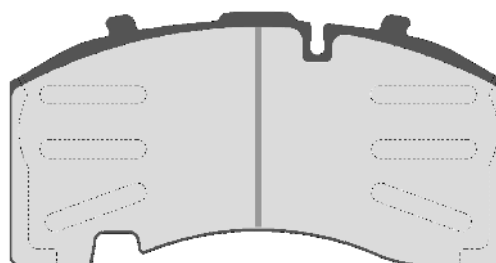
Length: 210.45 | Width: 104.25 | Thickness: 30.90 / 31.40
 Application: Frehauf (SMB) Trailer Axles, SAF Trailer Axles

29165

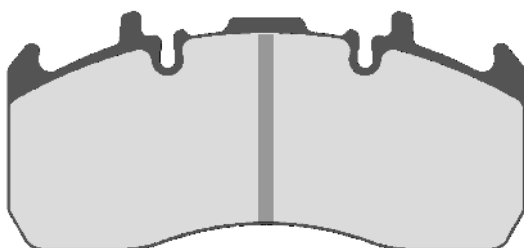
Length: 210.90 | Width: 92.50 | Thickness: 29.50 / 30.00
 Application: BPW Axles

29167

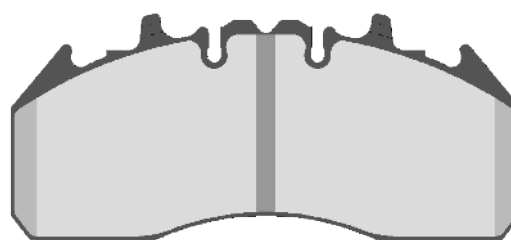
Length: 247.7 | Width: 109.50 | Thickness: 30
 Application: BPW Axles

29171

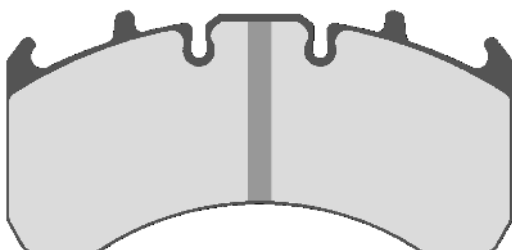
Length: 210.10 | Width: 108.40 | Thickness: 29.50 / 30.00
 Application: BPW Axles

29173

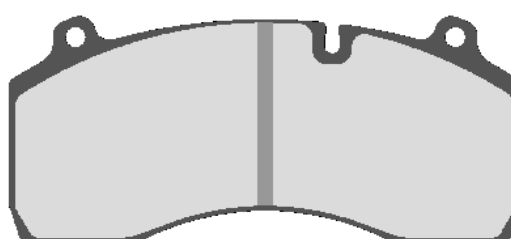
Length: 216.90 | Width: 96.60 | Thickness: 29.50 / 30.00
 Application: Renault, Volvo

29174

Length: 249.80 | Width: 106.40 | Thickness: 28.75 / 29.25
 Application: Renault, Volvo

29177

Length: 211.00 | Width: 99.50 | Thickness: 28.75 / 29.25
 Application: Meritor/ROR, Renault, Volvo

29181

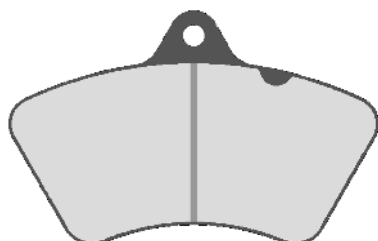
Length: 210.20 | Width: 92.10 | Thickness: 29.50 / 30.00
 Application: Renault

D268-INNER


Length: 295.30 | Width: 122.00 | Thickness: 30.00 / 30.50
Application: Meritor

D268-OUTER

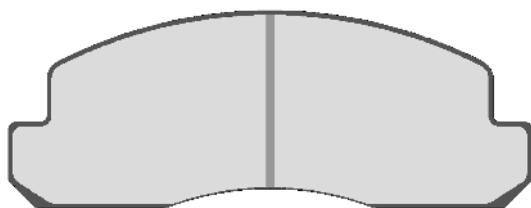
Length: 296.5 | Width: 133.60 | Thickness: 20.40 / 20.90
Application: Meritor

29498

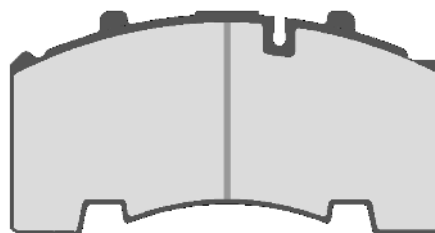
Length: 179 | Width: 112.60 | Thickness: 19.80 / 20.20
Application: Kassbohrer

29747

Length: 139.60 | Width: 121.00 | Thickness: 31.80 / 32.20 (Excl. Step)
Thickness: 34.60 / 35.00 (Incl. Step)
Application: Auwater, Bova, DAF, Kassbohrer, MAN, Van Hool

TVS/DB/TYC/1

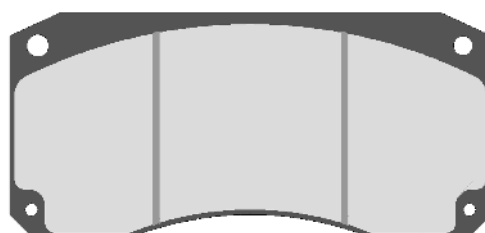
Length: 166.50 | Width: 62.8 | Thickness: 19.70 / 20.00
Application: Toyota Coaster

29308

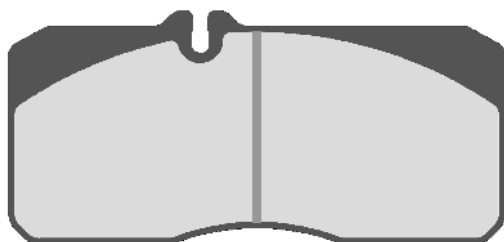
Length: 210.60 | Width: 108.50 | Thickness: 29.50 / 30.00
Application:

29039

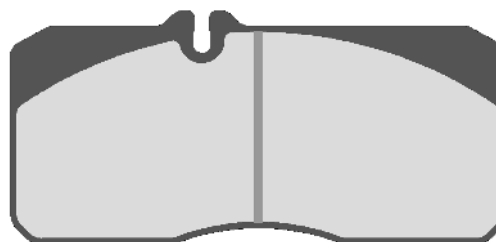
Length: 175.40 | Width: 78.00 | Thickness: 21.90 / 22.30
Application:

29043

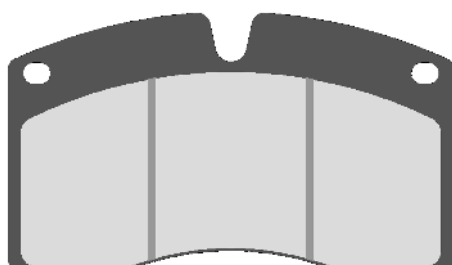
Length: 204.00 | Width: 95.50 | Thickness: 23.70 / 24.00
Application: RVI

29055

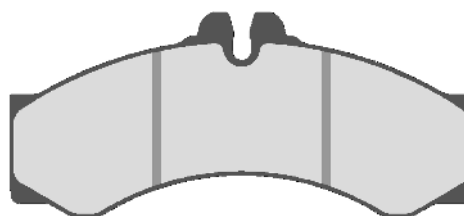
Length: 175.80 | Width: 82.50 | Thickness: 21.50 / 22.00
Application: MAN, Wabco

29056

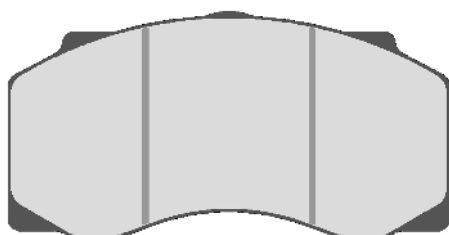
Length: 175.80 | Width: 82.50 | Thickness: 22.50 / 23.00
Application: MAN

29072

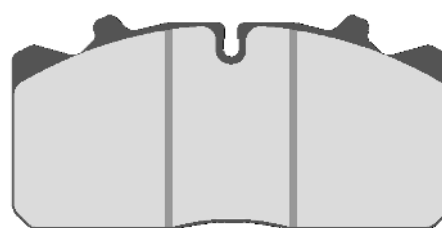
Length: 169.60 | Width: 97.50 | Thickness: 18.90 / 19.20
Application: Renaultt RVl

29076

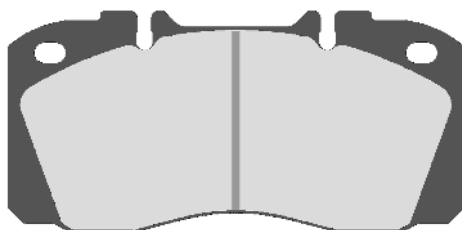
Length: 164.50 | Width: 72.80 | Thickness: 20
Application: Mercedes Benz

29077

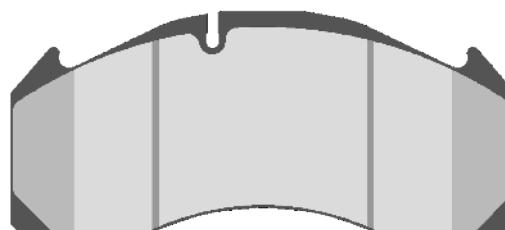
Length: 204.60 | Width: 105.90 | Thickness: 26.40 / 26.70
Application: DAF

29091

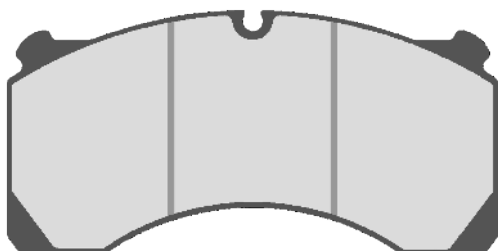
Length: 175.60 | Width: 82.50 | Thickness: 25.50 / 26.00
Application: Man

29122

Length: 174.50 | Width: 75.50 | Thickness: 21.50 / 22.00
Application: IVECO

29125

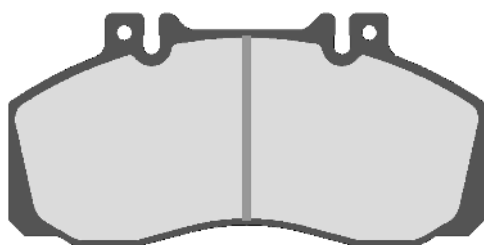
Length: 249.45 | Width: 111.20 | Thickness: 28.75 / 29.25
Application: Meritor, Volvo

29155

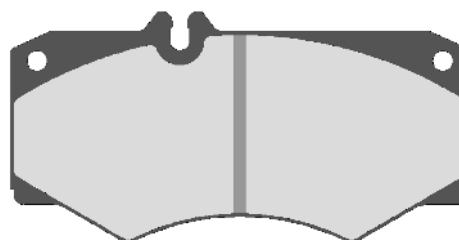
Length: 205.65 | Width: 102.30 | Thickness: 27
 Application: Meritor | This pad replaces 29124

29302

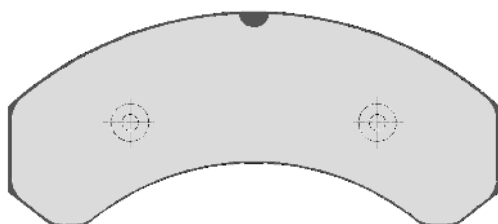
Length: 176 | Width: 78 | Thickness: 21.70 / 22.20
 Application: Ford, Volvo, AWD MCW, Optare

29835

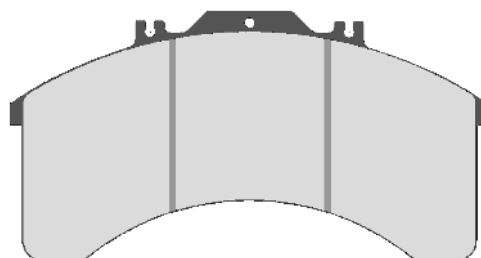
Length: 175.00 | Width: 75.60 | Thickness: 21.40 / 21.70
 Application: Mercedes benz, Optare

20784

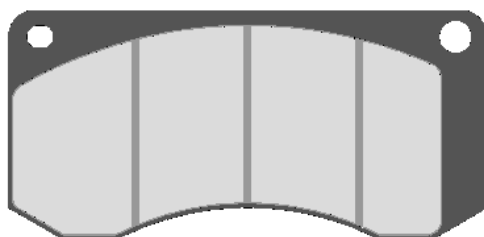
Length: 149.00 | Width: 56.00 | Thickness: 17.50 / 18.00
 Application: Mercedes Benz , Tempo Traveller

29008

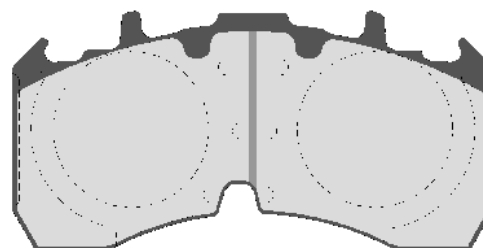
Length: 258.50 | Width: 112.00 | Thickness: 21.70 / 22.00
 Application: Kassbohrer, Knorr

29011

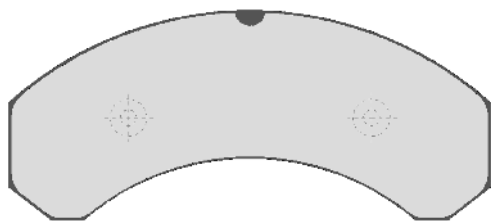
Length: 240.80 | Width: 125.00 | Thickness: 24.50 / 25.00
 Application: IVECO

29013 (LH)-(RH)

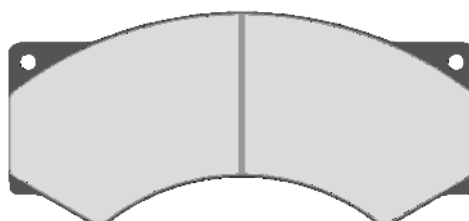
Length: 180.00 | Width: 85.67 | Thickness: 21.20 / 21.50
 Application: Dennis, Renault RVI

D2526

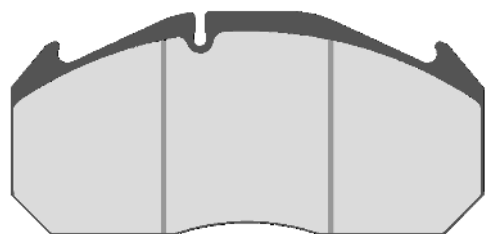
Length: 216.3 | Width: 107 | Thickness: 30.2
 Application: Meritor EX+ LS

29015

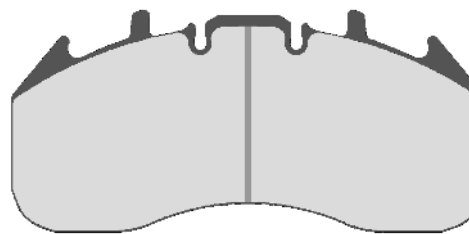
Length: 258.50 | Width: 112.00 | Thickness: 19.70 / 20.00
Application: Kassbohrer, Knorr

29017

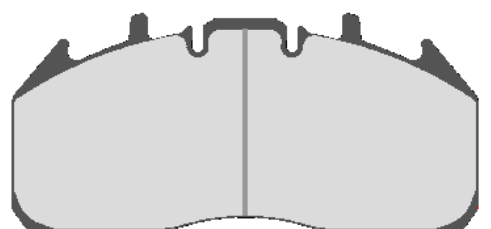
Length: 191.00 | Width: 87.90 | Thickness: 22.50 / 23.00
Application: DAF, IVECO, Avia, Leyland

29030

Length: 249.85 | Width: 118.10 | Thickness: 27.50 / 28.00
Application: Kassbohrer, Renault RVI, MAN, Dennis

29187

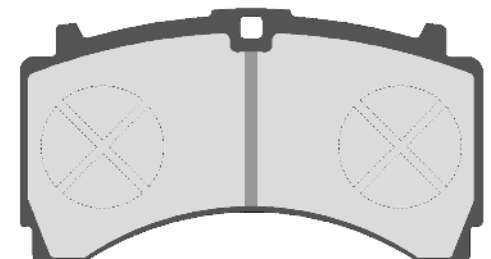
Length: 249.50 | Width: 113.75 | Thickness: 28.50 / 29
Application: Yutong, Opiarte

29188

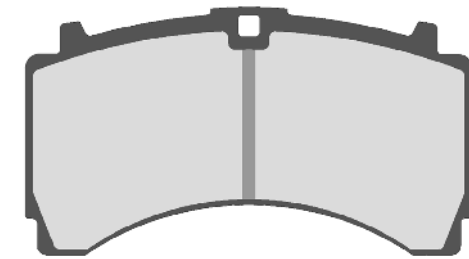
Length: 249.65 | Width: 113.75 | Thickness: 29.50 / 30.00
Application: Meritor

29189

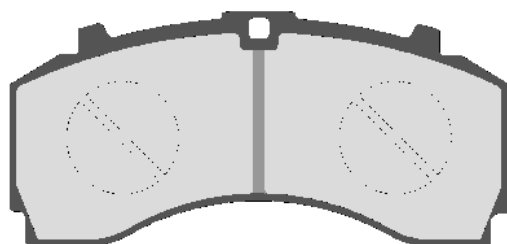
Length: 216.50 | Width: 108.75 | Thickness: 28.5 / 29.00
Application: Meritor

29244

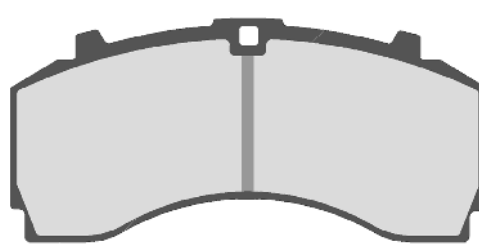
Length: 207.50 | Width: 114.60 | Thickness: 29.50 / 30.00
Application: Knorr, Bremse, Mercedes

29245

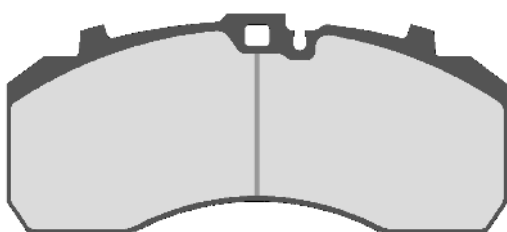
Length: 207.50 | Width: 114.60 | Thickness: 29.50 / 30.00
Application: Knorr, Bremse, Mercedes

29246

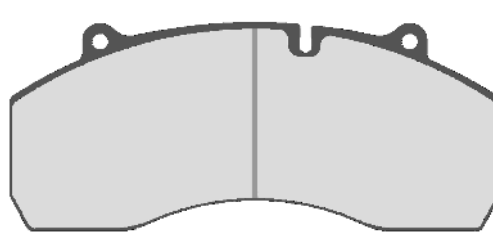
Length: 243.50 | Width: 115.00 | Thickness: 29.50 / 30.00
Application: Knorr, Bremse, Mercedes

29247

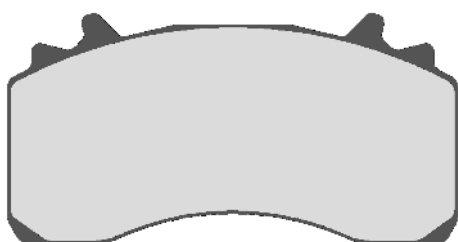
Length: 243.50 | Width: 115.00 | Thickness: 29.50 / 30.00
Application: Knorr, Bremse, Mercedes

29253

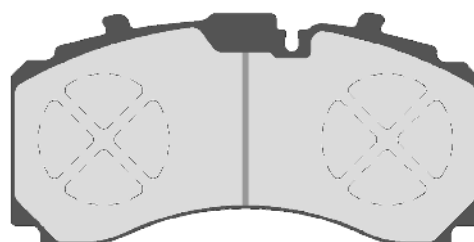
Length: 247.60 | Width: 107.80 | Thickness: 29.75 / 30.25
Application: BPW, DAF, Mercedes

D1441

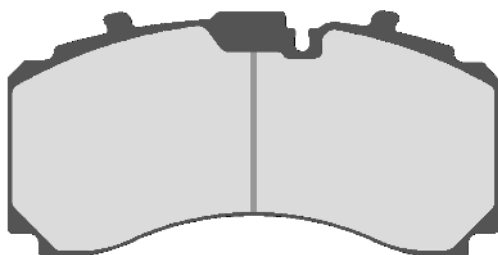
Length: 247.20 | Width: 105 | Thickness: 29.80 / 30.00
Application: Kennworth

D2061

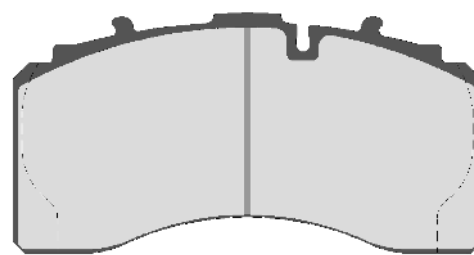
Length: 210.15 | Width: 102.50 | Thickness: 28.50 / 29.00
Application: Freightliner, Wabco Maxxus

D2252-INNER

Length: 215.00 | Width: 106.60 | Thickness: 29.80 / 30.20
Application: Knorr ST7

D2252-OUTER

Length: 210.70 | Width: 108 | Thickness: 29.80 / 30.20
Application: Knorr ST7

D2403

Length: 216.30 | Width: 107.1 | Thickness: 29.80 / 30.00
Application: Knorr SK7

[illegible]



A series of 25 horizontal lines spanning the width of the page, intended for handwritten notes or specifications.



WTS International



+91 98301 68038/95822 44269



gurvinder.kohli82@gmail.com



www.wtsinternational.in



1/1 Mrigendralal Mitter Road, Kolkata,
West Bengal – 700017, India

